


#### DIMENSIONS:

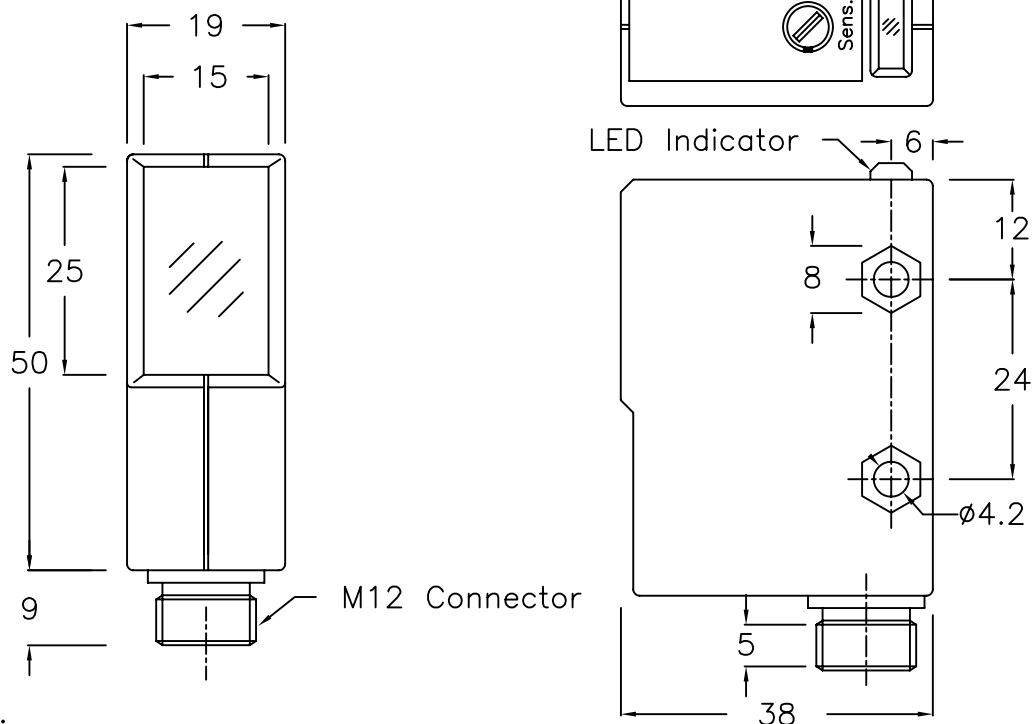

#### SPECIFICATIONS:

Type	: Thrubeam – Receiver
Supply Voltage	: 10 – 30 VDC
Maximum Allowable Ripple	: <10%
Output Logic	: PNP, D/L Selectable
Operating Range Sn	: 10Mtrs, Sensitivity Adj.
Hysteresis	: <10%
No Load Current	: <50mA
Load Current	: 200mA Max.
Response Frequency	: 250 Hz Max.
Residual Voltage	: <0.8V
Voltage Drop	: 2.2 V
Permissible Ambient Light	: 3000 Lux.
O/P Protection	: Short circuit & Polarity reversal
Sensor Connection in Series	: 2Nos Max
Operating temperature	: 0 to 60°C
Function Indication	: Red LED–Output, Green LED–Stability
Connection Type	: M12 Connector
Housing	: ABS Plastic 50x38x19 mm

Revised on	Sign
<b>16/01/02</b>	